



MASTERColour CDM-Tm Elite Mini

MASTERColour CDM-Tm Elite Mini 20W/830 GU6.5 1CT

Mini, single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high colour rendering

Product data

General Information	
Cap base	GU6.5 [GU6.5]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	12000 h
Life to 10% failures (nom.)	14000 h
Life to 20% failures (nom.)	16000 h
Life to 50% failures (nom.)	20000 h
ANSI code HID	C156/E
Light Technical	
Colour Code	830 [CCT of 3,000 K]
Lamp Luminous Flux (Min)	1620 lm
Lamp Luminous Flux (Nom)	1800 lm
Colour Designation	Warm white (WW)
Lumen maintenance 1,000 hours (nom.)	91 %
Lumen maintenance 12,000 hours (nom.)	77 %
Lumen maintenance 10,000 hours (nom.)	78 %
Lumen maintenance 2,000 hours (nom.)	87 %
Lumen maintenance 4,000 hours (nom.)	84 %
Lumen maintenance 5,000 hours (nom.)	83 %
Chromaticity coordinate X (nom.)	0.436

Chromaticity coordinate Y (nom.)	0.396
Colour Temperature, horizontal (Nom)	3000 K
Lamp Luminous Efficacy EM (Nom)	90 lm/W
Colour Rendering Index,horiz (Min)	81
Colour Rendering Index,horiz (Nom)	84

Operating and Electrical	
Power (Rated) (Nom)	20.0 W
Lamp current run-up (max.)	0.5 A
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	100 V
Voltage (Min)	90 V
Voltage (Nom)	95 V

Controls and Dimming	
Dimmable	no
Run-up time 90% (max.)	3 min

MASTERCcolour CDM-Tm Elite Mini

Mechanical and Housing

Bulb finish Clear

Approval and Application

Energy efficiency label (EEL) A+
 Mercury (Hg) content (nom.) 3.5 mg
 Energy Consumption kWh/1000 h 22 kWh

UV

PET (NIOSH) (min.) 8 h/500lx
 Damage factor D/fc (max.) 0.5

Luminaire Design Requirements

Bulb temperature (max.) 380 °C
 Cap base temperature (max.) 250 °C

Product Data

Full product code 872790089083900
 Order product name MASTERCcolour CDM-Tm Elite Mini 20W/830 GU6.5 1CT
 EAN/UPC – product 8727900890839
 Order code 928183505130
 Numerator – quantity per pack 1
 Numerator – packs per outer box 12
 Material no. (I2NC) 928183505130
 Net weight (piece) 0.007 kg
 ILCOS Code MT/UB-20/830-H-GU6.5-13.3/52

Warnings and Safety



Dimensional drawing

D

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-Tm Elite Mini 20W/830 GU6.5 1CT	13.3 mm	0.5 in	3.4 mm	28 mm	32 mm	30 mm	56.7 mm

CDM-Tm 20W/830 GU6.5


Photometric data

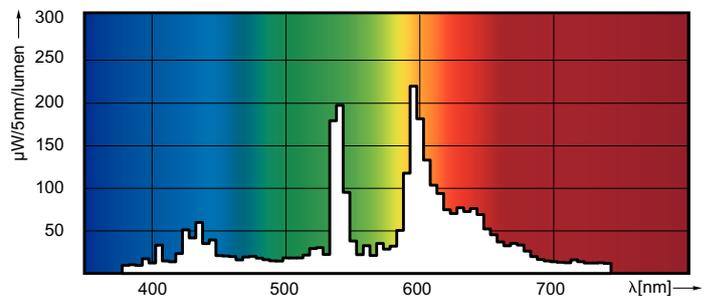

LDPO_CDM-Tm_20W_830_GU65-Spectral power distribution Colour

MASTERCcolour CDM-Tm Elite Mini

Lifetime

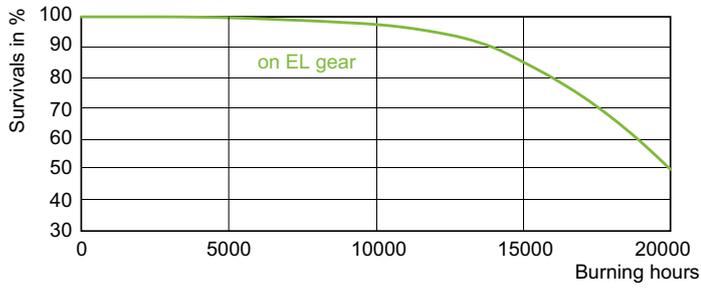

LDLE_CDM-T-E_0006-Life expectancy diagram

